



## DMS removing covers

After removing the top and front covers, remove the three screws shown below (red circles):

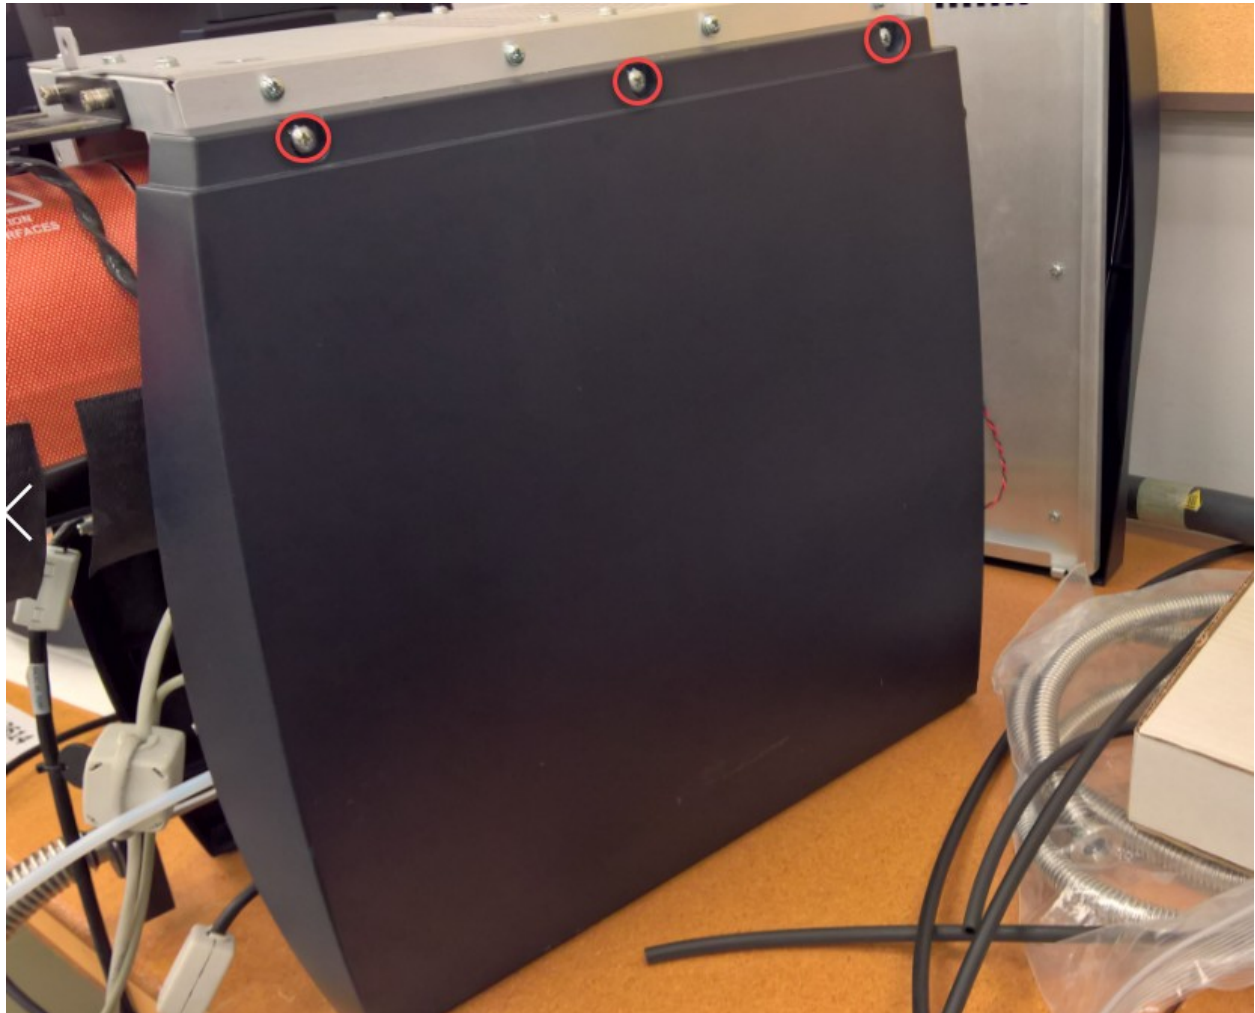

The side cover is further held in place by three screw posts set in vertical slots. The cover needs to be slightly lifted up and then away from the instrument to release these. The posts are shown here (red circles) in a cover already removed:

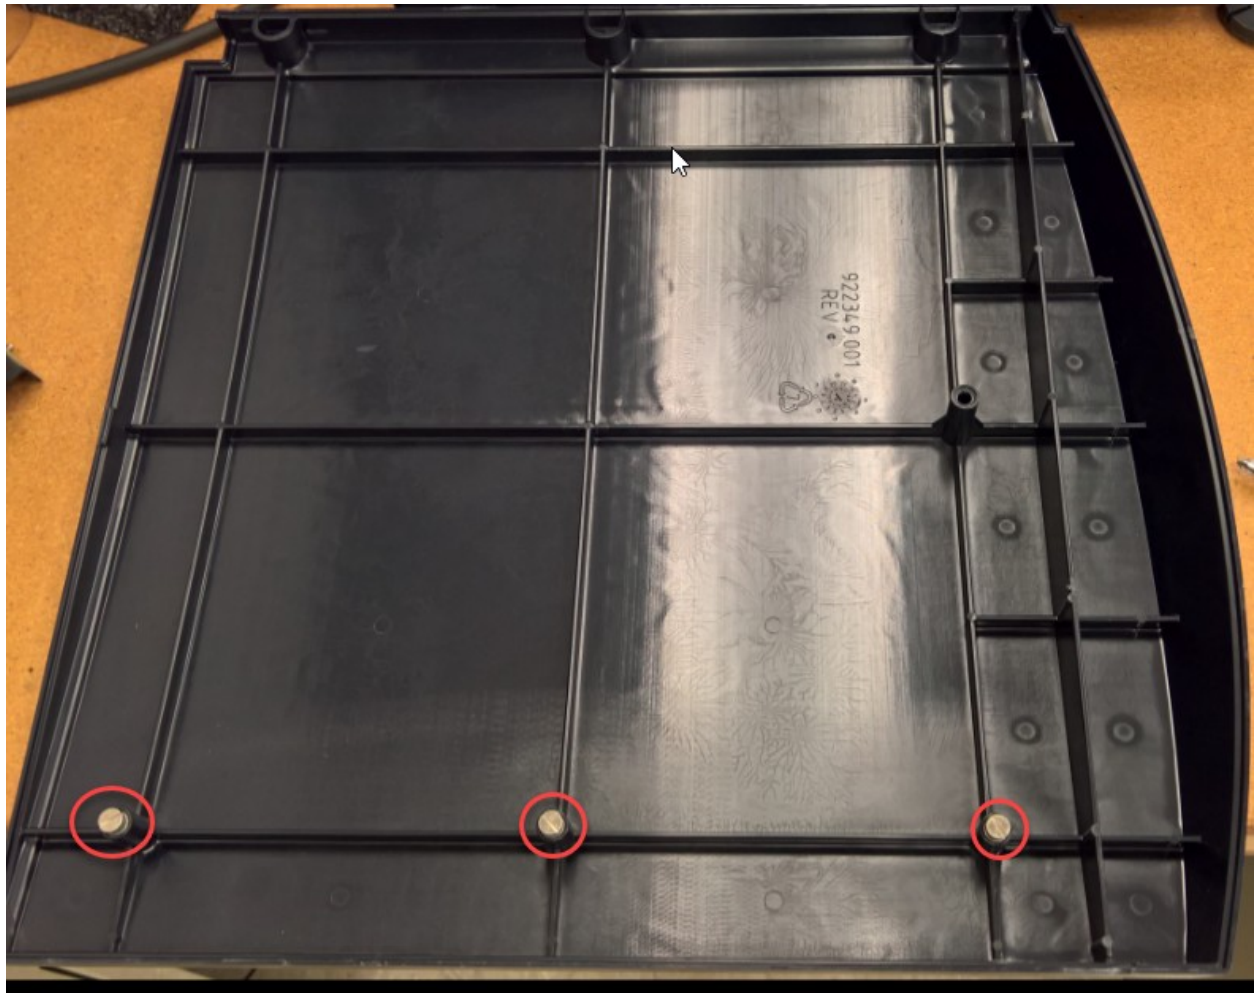

When putting the cover back on, these posts have to fit in the slots shown below (red circles):

